



2025

CATALOGUE

Shaftless Electric Pumps



HIGH VOLUME PUMPS

Unlocking high efficiency with the ultimate volume performance



// TABLE OF CONTENTS

| Introduction | | Pumps capacity | 09 |
|------------------------|----|-------------------|----|
| About the Company | 01 | | |
| Our Technology | 03 | Pumps accessories | 10 |
| Competitive Advantages | 04 | <u>-</u> | |

Configurations 05

Pumps 07

// INTRODUCTION: ABOUT THE COMPANY

We are a Dutch manufacturer for shaftless electric pumps. We develop and manufacture electric pumps from 0.5 to 75.0kW for industrial, subsea and private applications.

With our specialized team, we have created the perfect pump. A pump which weighs little, is relatively small and has high volume power. These benefits make sure that we can provide our customers the perfect fit for their applications.

Our production is located in the Netherlands. This makes monitoring quality a lot easier. Which allows us to guarantee that the quality of our products is very high.

User-friendly

Our pump does not weigh much, is relatively small and there is almost no maintenance required.

Quality control

Our production, R&D, and office are based in the Netherlands to ensure product quality.

Sustainable impact

Our electric pump has a beneficial effect on air quality, noise pollution and the climate.



// INTRODUCTION: OUR TECHNOLOGY

A HighVolume Pump contains it's electric winding in the outer (stator) housing. This housing is casted with epoxy to avoid any use of sealings. The inner housing which contains the magnets is also potted to avoid any internal corrosion. The bearing system is water lubricated and will last for thousands of hours by normal use.

Each part has been simulated via CFD analysis and intensively tested in real circumstances.



// INTRODUCTION: COMPETITIVE ADVANTAGES



Our electric pumps deliver high volume, low-power performance for optimal efficiency.

Our electric pumps boast limited dimensions for efficient and space-saving projects.

With our pumps, it is possible to pump up contaminated water.

No center shaft limits the chance that vegetation, fishing ropes or plastic will get stuck in the propeller.

The pump has been designed by our engineering department to require almost no maintenance.

// CONFIGURATIONS

PUMPS

Electric pumps 0.5 - 75.0 kW



Pump 0.5 - 5.0kW



Pump 8.0 - 22.0kW



Pump 25.0 - 75.0kW

ACCESSORIES

Optimize with the right accessories













3 Mounting flange

// PUMPS CAPACITY


A Rim Drive contains it's electric winding in the outer (stator) housing. This housing is casted to avoid any use of sealings. The inner housing which contains the magnets is also potted to avoid any internal corrosion. The bearing system is water lubricated and will last for thousands of hours by normal use.

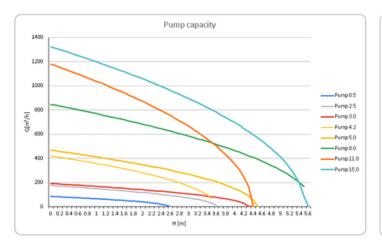


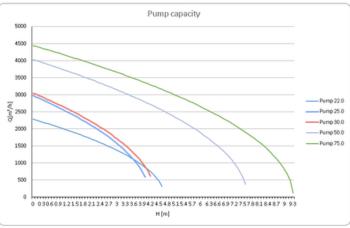










| | Pump 0.5 | Pump 2.5 | Pump 3.0 | Pump 4.2 | Pump 5.0 | Pump 8.0 | Pump 11.0 |
|-----------------------|--|--|--|--|--|--|--|
| Input power* | 500 Watt | 2.500 Watt | 3.000 Watt | 4.200 Watt | 5.000 Watt | 8.000 Watt | 11.000 Watt |
| Voltage | 48V or 230V | 24V | 48V, 230V or 400V | 24V | 48V or 400V | 48V or 400V | 48V or 400V |
| Weight dry (kg) | 2.5 | 3.5 | 3.5 | 5 | 5 | 11 | 11 |
| Waterproofness | IP68 |
| Efficiency | > 87% | > 87% | > 87% | > 87% | > 87% | > 87% | > 87% |
| Outside diameter | 108mm | 141mm | 141mm | 191mm | 191mm | 290mm | 290mm |
| Length (excl. flange) | 76mm | 110mm | 110mm | 110mm | 110mm | 110mm | 110mm |
| Propeller diameter | 65mm | 86mm | 86mm | 133mm | 133mm | 168mm | 212mm |
| RPM Control** | Manual or CAN (Other on request) |
| Flow rate* | 85 m3/h | 150 m3/h | 193 m3/h | 355 m3/h | 465 m3/h | 815 m³/h | 1180 m3/h |

^{*}Depending on configuration, water temperature, propeller, cables and motor controller cooling.

^{**}The combination of 230V/400V and the CAN (other CM) involve additional costs.







| | Pump 15.0 | Pump 22.0 | Pump 25.0 | Pump 30.0 | Pump 50.0 | Pump 75.0 |
|-----------------------|--|--|--|--|--|--|
| Input power* | 15.000 Watt | 22.000 Watt | 25.000 Watt | 30.000 Watt | 50.000 Watt | 75.000 Watt |
| Voltage | 48V or voltage on request | 48V or 96V | 96V or voltage on request | 110V or voltage on request | 400V or voltage on request | 400V or voltage on request |
| Weight dry (kg) | 15 | 50 | 70 | 70 | 70 | 75 |
| Waterproofness | IP68 | IP68 | IP68 | IP68 | IP68 | IP68 |
| Efficiency | > 87% | > 87% | > 87% | > 87% | > 87% | > 87% |
| Outside diameter | 290mm | 378mm | 470mm | 470mm | 470mm | 470mm |
| Length (excl. flange) | 145mm | 161mm | 180mm | 180mm | 180mm | 218mm |
| Propeller diameter | 212mm | 290mm | 341mm | 341mm | 341mm | 34lmm |
| RPM Control** | Manual or CAN (Other on request) |
| Flow rate* | 1323 m3/h | 2155m3/h | 2970 m3/h | 3047 m3/h | 4173 m3/h | 4400m3/h |

// PUMPS ACCESSORIES



1 Tunnel set

The pump is suitable for easy installation in a tube or tunnel. We are able to deliver a customized connector to any diameter you prefer. If you would like to make your own connector please get in contact with our sales department to make sure you get all dimensions you need.



2 Flow ring

The inlet flow ring is an innovative and highly efficient solution designed to optimize water intake for your pump. It is specifically engineered to 'suck' water smoothly and effectively into the pump, ensuring maximum performance and reliability.



3 Mounting flange

The mounting bracket has been developed to realize a plug and play installation. In case a custom mounting is preferred you can contact our sales team to discuss the possibilities.

Our markets

Our pumps are used across a wide range of applications and industries. With a focus on innovation and durability, we provide customized solutions to meet the needs of each market we serve.

- Fish Farms
- Water Leveling
- Firefighting
- Emergency Response
- Water Treatment
- Energy Generation
- Ballast Systems
- Cooling







<u>High Volume Pumps</u>



+31 (0) 85 482 48 50



www.highvolumepumps.nl



info@highvolumepumps.nl

Wanraaij 33, Andelst. The Netherlands